


# Anti Slip Coatings




Do you have heavy pedestrian or vehicle traffic?

|                         | Pedestrian traffic                                                                  | Vehicle traffic                                                                      |
|-------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                         | Light vehicle traffic or heavy pedestrian traffic                                   | Heavy pedestrian traffic, vehicle traffic or industrial                              |
|                         | LOCTITE PC 6261                                                                     | LOCTITE PC 6315                                                                      |
| Colour                  | Grey or Yellow                                                                      | Black                                                                                |
| Coverage per pack       | 4,65 m2                                                                             | 3,25 m2                                                                              |
| Working time            | Depends on area of use                                                              | 60 minutes                                                                           |
| Size / IDH number       | 6,36 KG / 2050961 GY / 2236679 YL                                                   | 6,46 KG / 1910285                                                                    |
| Illustration of profile |  |  |



**LOCTITE® PC 6261**  
Heavy pedestrian - Light vehicle traffic

For walkways and loading areas. For areas with heavy pedestrian traffic or light rolling traffic. Ideal for ramps, walkways, changing rooms, stairs and industrial areas. Single component & fire retardant when cured

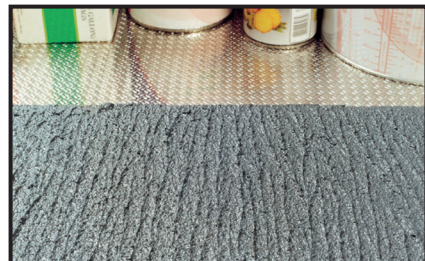

**LOCTITE® PC 6315**  
Zero VOC, Vehicle traffic

Extremely high resistance, without solvent, vehicle quality. Solvent-free epoxy with low odour and an aggressive surface profile. Used for long-term coating in demanding areas such as mining, marine, power or oil and gas industries. Also used as a vehicle coating on trailers and tailgates on small trucks





## Application

### STEP ONE: SURFACE TREATMENT

The surface must be: 1) Clean, 2) Dry, 3) Roughened. Remove loose or flaky material. (Use mechanical brush or blasting.) If the surface is wood, remove loose material. If the surface is oily, remove oils and surface contamination with LOCTITE® SF 7840 biodegradable detergents and degreasers. Use warm high pressure washer to remove detergent and contaminants. Allow the surface to dry completely. Alternatively solvent based cleaners can be used.

### STEP TWO: MARK THE APPLICATION AREA

Mark the area where the product is to be applied using masking tape.

### STEP THREE: MIX THE PRODUCT

If using a 2-component product, mix the two parts carefully. If you are using a 1-component product, mix for about three minutes to ensure fully mixed.

### STEP FOUR: APPLY THE PRODUCT

Carefully pour mixed product on the surface. Roll out the product. Use a light pressure to completely cover the surface. Remove the masking tape before the product has dried, ideally still wet.

As for all products of the brand LOCTITE®, we recommend reading the technical data sheet for complete instructions

## Benefits

### LOCTITE® ANTI SLIP COATINGS

- Outlast and outperform typical sand in paint systems or tapes
- The strongest, most aggressive anti-slip products available
- Resistant to harsh chemicals such as petrol, jet fuel and hydraulic fluid.
- Prevents costly slips, trips & falls in pedestrian traffic areas
- Grades tough enough to handle heavy forklift and vehicle traffic, and grades gentle enough for barefoot traffic.
- Increases safety on walkways, ramps and in entrances.
- Contaminants are trapped in the “valleys” and traction is maintained at the “peaks.”
- Products are available for both indoor and outdoor use applications.



**LOCTITE®**

**Henkel Ltd**  
Wood Lane End  
Hemel Hempstead  
Hertfordshire  
HP2 4RQ  
Tel: 01442 278100  
[www.henkel-adhesives.com/uk](http://www.henkel-adhesives.com/uk)



**Visit our YouTube channel  
to see our latest videos!**

