

LOCTITE®

LOCTITE HB X PURBOND-LINE

STRUCTURAL ADHESIVE SYSTEM FOR *DEMANDING* *HEAT* AND *FIRE* PERFORMANCE



LOCTITE HB X enables mass timber producers to deliver building products that meet the most stringent heat and fire safety standards, such as the PRG 320 Standard for Performance-Rated Cross-Laminated Timber.

LOCTITE HB X is used in the tallest timber buildings in North America, and a growing number of iconic, award-winning, wood buildings around the world.

The HB X Line belongs to the LOCTITE polyurethane adhesives, serving timber construction for over 30 years. All LOCTITE HB systems are adapted to manufacturers' operations and productivity goals.

Their environmental benefits include:

- › Low waste (due to precise dosing)
- › Cold pressing to ensure energy saving
- › Compliance with even the most stringent indoor air quality standards

Made without fibers, formaldehyde, or solvents, LOCTITE polyurethane one component systems create lasting bonds in high-performance, durable, premium-quality engineered wood products.



Henkel Adhesive Technologies



LOCTITE HB X PURBOND-LINE STRUCTURAL ADHESIVE SYSTEM FOR DEMANDING HEAT AND FIRE PERFORMANCE

Product Benefits

- › Charring rate of CLT 0.7 mm/min (20 mm to 40 mm lamella thickness)
- › Glue Line Integrity in Fire according to the future Eurocode 5.
- › Formaldehyde free – **JAIA 4 Stars**
- › Low VOC emissions – **GreenGuard UL2818**

Globally certified:

› North America

- › Adhesives for structural wood products – CSA 0122.9
- › Glue laminated timber certifications – AITC 405-2008 & ANSI/AITC A190.1-2007
- › Cross-laminated timber certification – ANSI/APA PRG 320-2019
- › Fire resistant building material – ASTM E119
- › Heat resistant adhesive for finger-jointing
HRA Finger joint/ASTM D7474 (HB X032)

› Europe


- › EN 15425 I 90 FJ 0.1 w (HB X052)
- › EN 15425 I 90 GP 0.3 w certified between HB X102 and HB X702

Product Specifications

Assembly time	3 – 70 min.
Press time	7,5 – 175 min.
Viscosity	20,000 – 32,000 mPa·s
Rheology	Thixotropic
Density	1.15 g/cm ³
Filler	Non-abrasive
AT/PT ratio	1 : 2.5

LOCTITE HB X PURBOND LINE

Product availability differs by region. Please consult our sales representative.

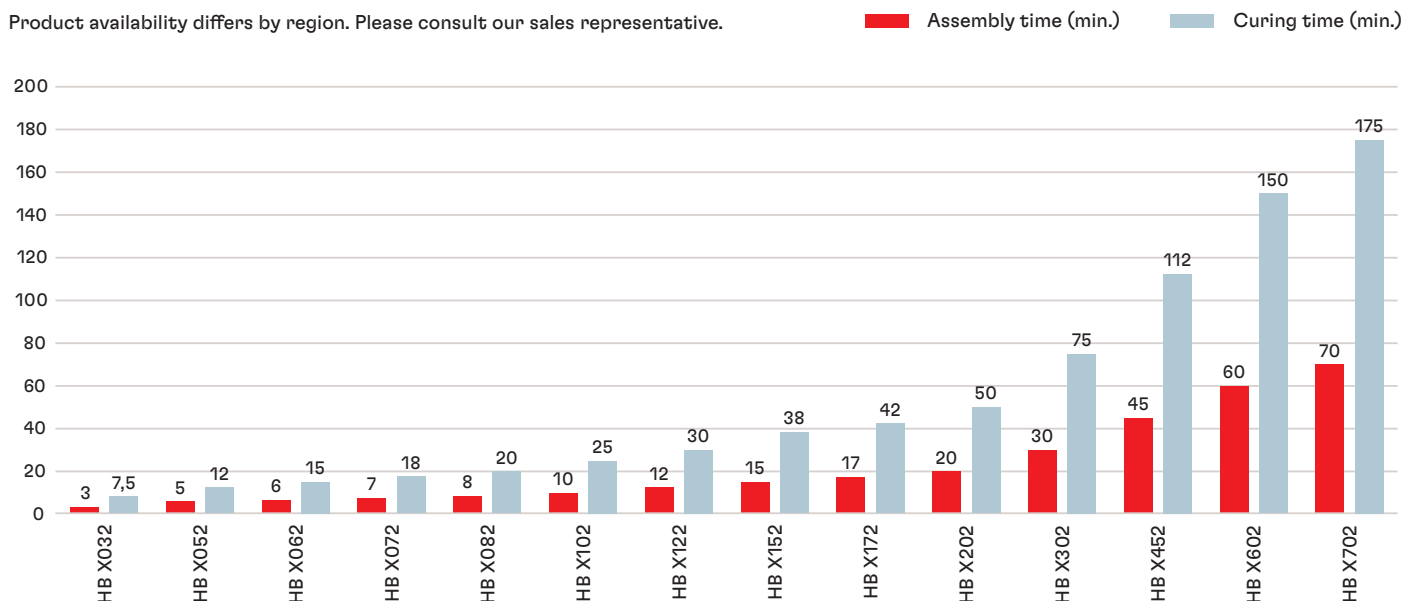

GET IN CONTACT WITH US

Henkel & Cie. AG
Industriestrasse 16
CH-6203 Sempach Station
Telefon +41 41 469 6860

Henkel Corporation
10 FINDERNE AVE., BRIDGEWATER,
NJ, 08807, USA
Toll Free: 888-480-1171



www.henkel-adhesives.com/engineered-wood



engineered-wood@henkel.com

The information provided herein, especially recommendations for the usage and the application of our products, is based upon our knowledge and experience. Due to different materials used as well as to varying working conditions beyond our control we strictly recommend to carry out intensive trials to test the suitability of our products with regard to the required processes and applications. We do not accept any liability with regard to the above information or with regard to any verbal recommendation, except for cases where we are liable of gross negligence or false intention. The information is protected by copyright. In particular, any reproductions, adaptations, translations, storage and processing in other media, including storage or processing by electronic means, enjoy copyright protection. Any exploitation in whole or in part thereof shall require the prior written consent of Henkel AG & Co. KGaA. Except as otherwise noted, all marks used in this document are trademarks and/or registered trademarks of Henkel and/or its affiliates in the US, Germany, and elsewhere. © Henkel AG & Co. KGaA, 03/2023